Programmable POS Keyboard

PKB Series



PKB-044




PKB-078




PKB-111

- **Dimensions**

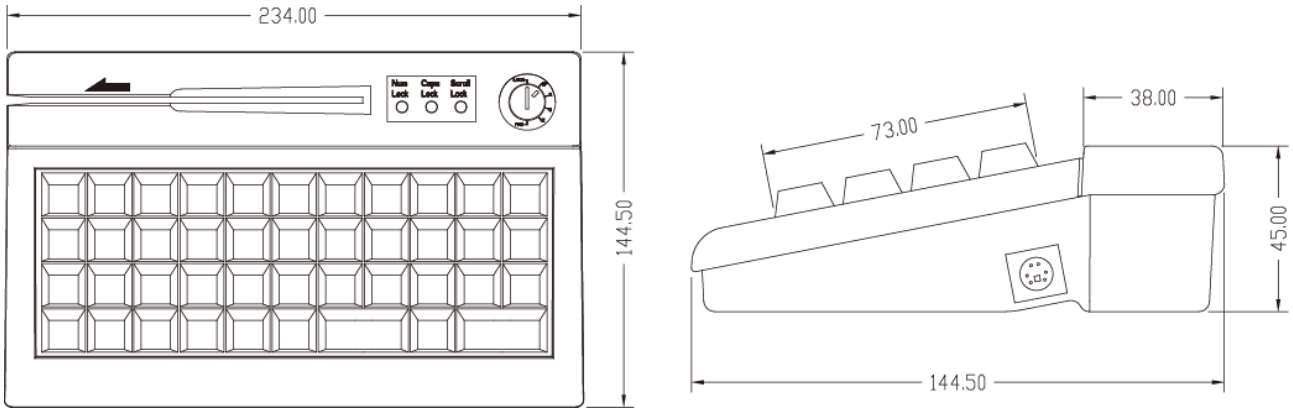



PKB-044

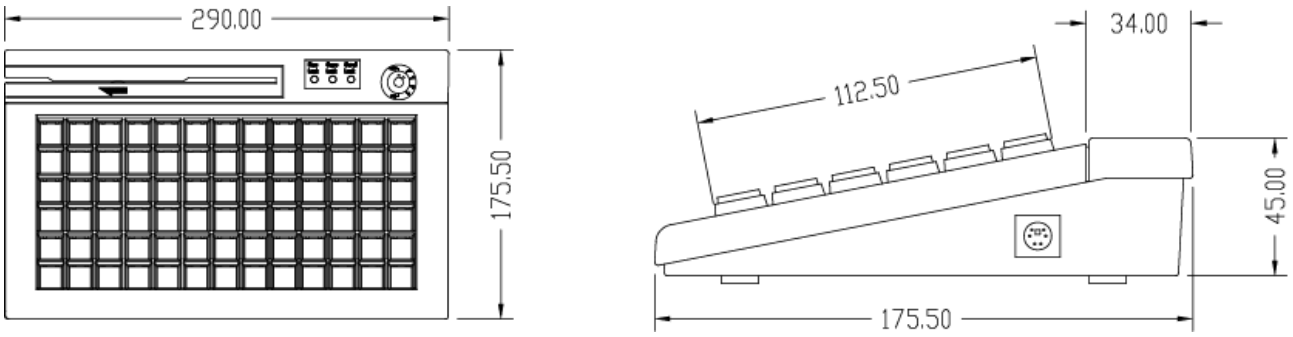

PKB-078

Fametech Inc.
12F.-8, NO.237, Sec.1, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
Tel: +886-2-8692-2060 Fax: +886-2-8692-2061 info@fametech.com.tw
www.fametech.com.tw

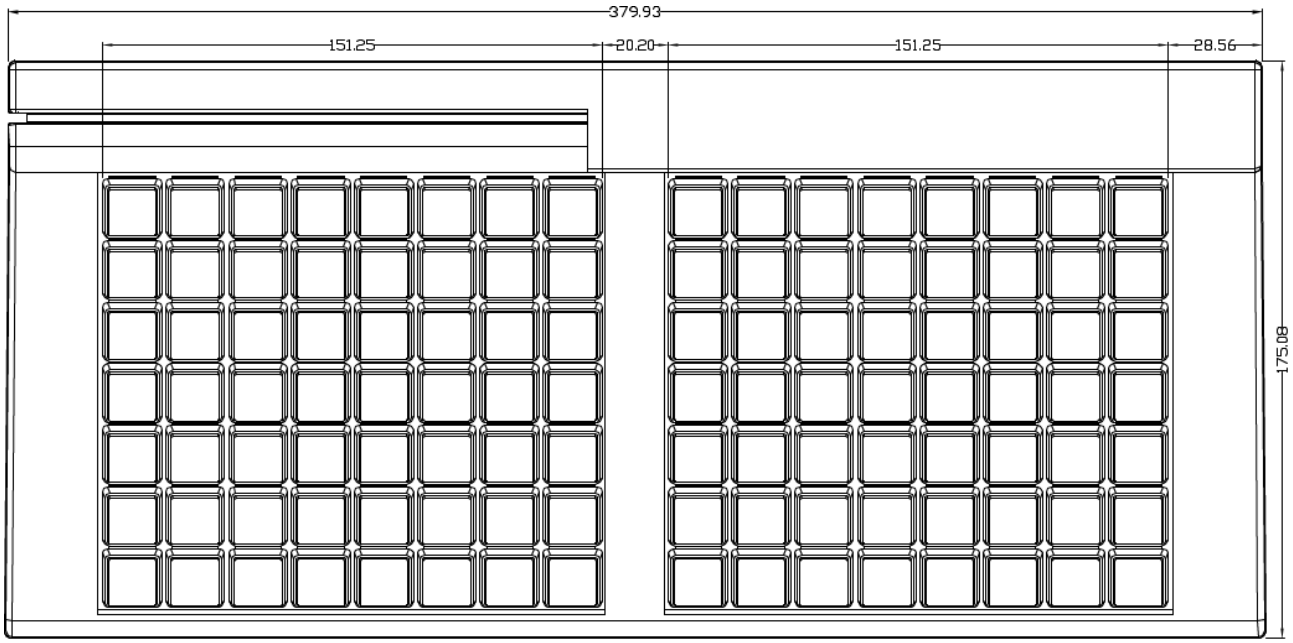

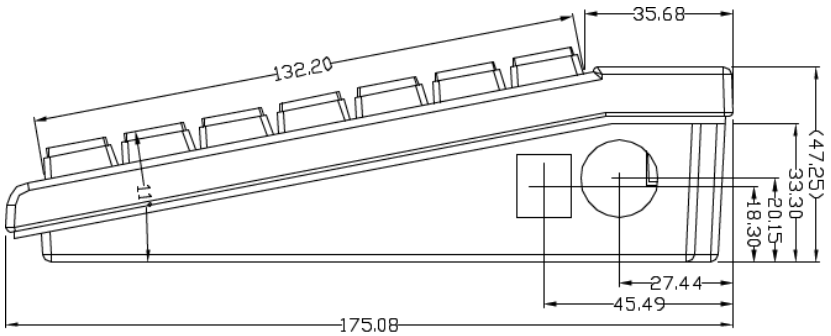

PKB-111

Fametech Inc.
12F.-8, NO.237, Sec.1, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
Tel: +886-2-8692-2060 Fax: +886-2-8692-2061 info@fametech.com.tw
www.fametech.com.tw

• Specifications

Model	PKB-044
Keyboard	
Key Layout	42 Keys
Key Type	Membrane
Key Travel	4mm ± 0.5 mm
Life Cycle	10 million operations
Indicator	3 LED Indicators
Key Lock	Optional
Interface	PS/2, USB
Key Configuration	Multiple Keys programmable (Key code or ASCII code)
Integrated Magnetic Card Reader (optional)	
Standard	Comply with ISO 7812, IBM standards, American Driving License
Card Density	Track 1: 210BPI with max. 76 characters Track 2: 75BPI with max. 37 characters Track 3: 210BPI with max. 107 characters
Magnetic Track	Track 1 or Track 2 or Track 3 or Dual Track (Track 1&2 or Track 2&3) or Three Track (Track 1&2&3)
Reading Speed	10 to 100 cm/sec.
Reading Cycle	30,000 or 1,000,000 (Option)
General	
Power Input	5VDC ± 10%
Current Consumption	less than 100 mA
OS Support	Windows-base (98/Me/2000/XP/Vista 32-bit)
Material	ABS
Color	Black
Weight	680 g
Dimension(L x W x H: mm)	234 x 144.5 x 45
Cable Length	2.8 m
Operating Temperature	0°C~40°C
Operating Humidity	40%-90% RH, non-condensing
Storage Temperature	-20°C~55°C
Storage Humidity	0%-90% RH, non-condensing

Fametech Inc.
12F.-8, NO.237, Sec.1, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
Tel: +886-2-8692-2060 Fax: +886-2-8692-2061 info@fametech.com.tw
www.fametech.com.tw

Model	PKB-078
Keyboard	
Key Layout	78 Keys
Key Type	Membrane or Mechanical
Key Travel	4mm ± 0.5 mm
Life Cycle	10 million operations
Indicator	3 LED Indicators
Key Lock	6 Position Key Lock & Keys
Interface	PS/2, USB
Key Configuration	Multiple Keys programmable (Key code or ASCII code)
Integrated Magnetic Card Reader (optional)	
Standard	Comply with ISO 7812, IBM standards, American Driving License
Card Density	Track 1: 210BPI with max. 76 characters Track 2: 75BPI with max. 37 characters Track 3: 210BPI with max. 107 characters
Magnetic Track	Track 1 or Track 2 or Track 3 or Dual Track (Track 1&2 or Track 2&3) or Three Track (Track 1&2&3)
Reading Speed	10 to 100 cm/sec.
Reading Cycle	30,000 or 1,000,000 (Option)
General	
Power Input	5VDC ± 10%
Current Consumption	less than 100 mA
OS Support	Windows-base (98/Me/2000/XP/Vista 32-bit)
Material	ABS
Color	Black
Weight	1120 g
Dimension(L x W x H: mm)	290 x 175 x 45
Cable Length	2.8 m
Operating Temperature	0°C~40°C
Operating Humidity	40%-90% RH, non-condensing
Storage Temperature	-20°C~55°C
Storage Humidity	0%-90% RH, non-condensing

Fametech Inc.

12F.-8, NO.237, Sec.1, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Tel: +886-2-8692-2060 Fax: +886-2-8692-2061 info@fametech.com.tw

www.fametech.com.tw

Model	PKB-111
Keyboard	
Key Layout	111 Keys
Key Type	Mechanical
Key Travel	4mm ± 0.5 mm
Life Cycle	10 million operations
Indicator	3 LED Indicators
Key Lock	N/A
Interface	PS/2, USB
Key Configuration	Multiple Keys programmable (Key code or ASCII code)
Integrated Magnetic Card Reader (optional)	
Standard	Comply with ISO 7812, IBM standards, American Driving License
Card Density	Track 1: 210BPI with max. 76 characters Track 2: 75BPI with max. 37 characters Track 3: 210BPI with max. 107 characters
Magnetic Track	Track 1 or Track 2 or Track 3 or Dual Track (Track 1&2 or Track 2&3) or Three Track (Track 1&2&3)
Reading Speed	10 to 100 cm/sec.
Reading Cycle	30,000 or 1,000,000 (Option)
General	
Power Input	5VDC ± 10%
Current Consumption	20 mA (standby) / 40 mA (max.) / 115 mA (max. with MSR)
OS Support	Windows-base (98/Me/2000/XP/Vista 32-bit)
Material	ABS
Color	Black, Beige
Weight	1800 g
Dimension(L x W x H: mm)	380 x 175.08 x 47.25
Cable Length	2.8 m
Operating Temperature	0°C~50°C
Operating Humidity	40%-90% RH, non-condensing
Storage Temperature	-20°C~70°C
Storage Humidity	10%-90% RH, non-condensing

Fametech Inc.

12F.-8, NO.237, Sec.1, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Tel: +886-2-8692-2060 Fax: +886-2-8692-2061 info@fametech.com.tw

www.fametech.com.tw