ASAP POS

MODULAR POS INNOVATION

KM15XW6




BUILD YOUR POS WITH MODULES



Screen Module | System Box Module | POS

SCREEN MODULE

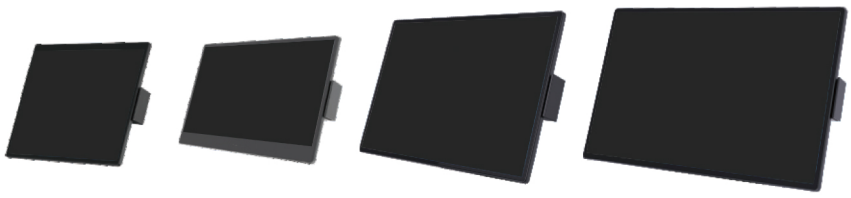

15" | 15.6" | 18.5" | 21.5"

SYSTEM BOX MODULE



- Windows Box Module

Intel N97 (6M Cache, up to 3.60 GHz)
Intel Core i3-N305 (6M Cache, up to 3.80 GHz)
Intel Core i5-1235U (12M Cache, up to 4.40 GHz)



- Android Box Module

RK3568 4xCortex-A55 up to 2.0GHz, Android 11.0
RK3588 4xCortex-A76 + 4xCortex-A55 up to 2.2GHz, Android 12.0
RK3576 4xCortex-A72 + 4xCortex-A53 up to 2.2GHz, Android 14.0



- Touch Monitor Box Module

HDMI + VGA

POS PERIPHERAL MODULE



DESIGNED WITH VERSATILITY IN MIND



SPECIFICATION

Processors	Intel® N97 (6M Cache, up to 3.60 GHz)	Intel® Core™ i3-N305(6M Cache, up to 4.40 GHz) Intel® Core™ i5-1235U(12M Cache, up to 4.40 GHz)
Memory	8GB Standard, DDR4 3200MHz(Max.32GB)	8GB Standard, DDR4 3200MHz(Max.32GB)
Storage	256GB Standard, M.22280 D2-M(Max.1TB)	256GB Standard, M.22280 D2-M(Max.1TB)
Operating Systems	Windows 10/Windows 11/Linux	Windows 10/Windows 11/Linux
LCD	15" TFT LCD/15.6" FHD IPS LCD /18.5" FHD IPS LCD/21.5" FHD IPS LCD	
Resolution	1024x768(15")/1920x1080(15.6")/1920x1080(18.5")/1920x1080(21.5")	
Brightness	350cd/m^2(15")/250 cd/m^2(15.6")/280 cd/m^2(18.5")/300 cd/m^2(21.5")	
Touch	Multi-point Projected Capacitive Touch Screen	
Speaker	2 x 2W(Stereo)	
COM	2 x RJ50(RS232)	2 x RJ50(RS232)
USB	4 x USB2.0, 4 x USB 3.0	4 x USB2.0, 4 x USB 3.0
LAN	1 x RJ45, Gigabit Ethernet	1 x RJ45, Gigabit Ethernet
WiFi/BT	802.11a/b/g/n/ac, 802.11ax optional/BT4.0	
Cash Drawer	1 x RJ11	1 x RJ11
Video	1 x HDMI	1 x HDMI
Audio	1 x Line-out&Mic-in 2-in-1	1 x Line-out&Mic-in 2-in-1
Customer Display	VFD, 20 Columns x 2 Lines 9.7" 2nd display(1024x768), 15" 2nd display(1024x768), 11.6" 2nd display(1920x1080), 15.6" 2nd display(1920x1080), Optional Touchscreen	
Peripherals	5MP Camera(USB) Fingerprint Reader(USB) NFC Card Reader(USB) 2D Barcode Scanner(USB) Dallas i-Button Reader(USB) Magnetic Stripe Reader(USB, Support 1&2&3 Track)	
Housing Material	Aluminum Die Casting Alloys	
VESA Compatibility	Support both 75 x 75 (mm) and 100 x 100 (mm)	